


PRODUCT DATA SHEET

PRODUCT NAME:

Acczent Esquisse

PRODUCT STRUCTURE

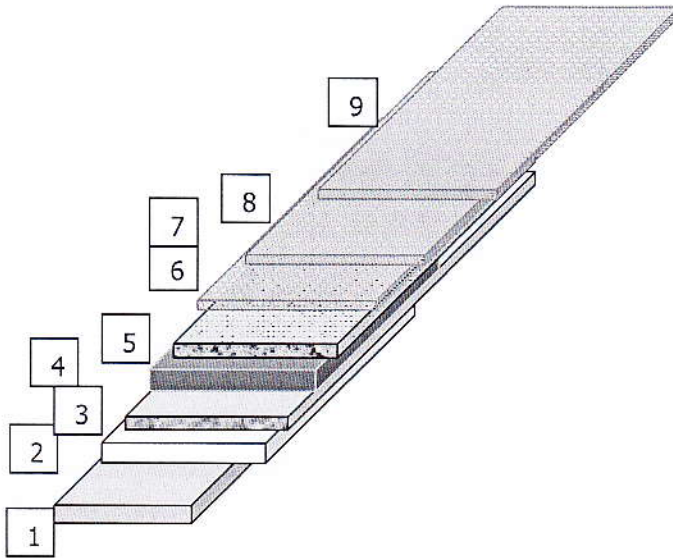

1. Back compact
2. Back coat
3. Glass issue
4. Saturant coat
5. Top compact
6. Print ink
7. Transparent 1
8. Transparent 2
9. UV protection

TECHNICAL/MARKETING PRODUCT CHARACTERISTIC

Floor covering for indoor use, EN 649	Standard	Commercial
Classification, EN 685		34/43
Product characteristics		
Overall thickness, mm	EN 428	2,0
Wear layer thickness, mm	EN 429	0,8
Total mass, g/m ²	EN 430	2800
Surface treatment-additional PU protection		-
Surface treatment-chemical/mechanical embossing		normal
Marketing characteristics		
Roll length 2,0 m	EN 426	23 (15-30)
Widths required, m	EN 426	2
Branded		Tarkett
Back printing		yes
Back embossing		no
Guarantee, year		10
Installation method		
Loose lay, double-sided adhesive tape		≤ 25 m²
Adhesive		> 25 m²

TARGET PRODUCT CHARACTERISTICS

	Standard	unit	value
Surface characteristics			
Scratch resistance	internal		good
Stain resistance	EN 423		good
Resistance to chemicals	EN 423		good
Alkali resistance	EN 423	pH	12
Castor chair	EN 425		Excellent no change of aspect
Simulated movement of a furniture leg resistance	EN 424		Excellent no damage with foot 2
Scuff resistance	internal		Excellent
Target gloss	internal	%	11
Physical performance			
Residual indentation	EN 433	mm	≤ 0,15
Resilient indentation	EN 433	%	-
Wear resistance-abrasion group	prEN 660-1	class	T
Impact resistance	internal		excellent
Tear resistance	internal		excellent
Curl	EN 434	mm	≤ 8,0
Light fastness (blue scale)	EN 20105 B02		7/8
Electrostatic properties- antistatic according to NF EN 14041:2005	NF EN 1081 & NF EN 1815	Ohm	Transversal 5.1E07 Surerficielle 1.6E09
Assessment of static electrical propensity- antistatic according to NF EN 14041:2005	NF EN 1081 & NF EN 1815	kV	Synthetic neolite N/A Caouchouk B.A.M 0.3
Dimensional stability	EN 434	%	≤ 0,4
Measurement of dynamic coefficient of friction on dry floor surfaces.	EN 13893		0,62
Thermal resistance	DIN 52612	m ² K/W	0,03-0,04
Water absorption	EN 661	g/100cm ²	< 0,06
Fire resistance	EN 13501-1	class	
Ramp test	DIN 51130	class	R 10
Fire resistance	EN 13501-1	class	Bfl-s1

Director LLC Tarkett Vinisisn

Roman Pukish

Prepared by Sviatoslav Vynnychuk

Chief of Quality Department
General Service of NPD, R&D, QA
18.05.2015